

Fenster • windows
 Rollläden • shutters
 Türen + Tore • doors
 Fassaden • curtain walling
 Baubeschläge • building hardware

TEST CERTIFICATE NO. 13/12-A422-Z1

Version 1.en

Initial type testing (ITT) of performance characteristics in accordance with EN 14351-1 :2006 + A1 : 2010 “Windows and doors - Product standard, performance characteristics - Part 1: Windows and external pedestrian doorsets without resistance to fire and/or smoke leakage characteristics – German version EN 14351-1:2006 + A1:2010”

Applicant Kompen PVC Yapı ve İnşaat Malzemeleri
 Sanayi ve Ticaret A.Ş.
 Istanbul yolu 45. Km.Ladik Mevkii
 Sarayönü - Konya 42435

Product type Inward opening tilt and turn single casements window,PVC, double glazing

Product name Fensterbau 3600

Hardware GU


Sealing TPV

Dimension Total outside dimensions (W x H) max. 900 mm x 2000 mm

Classification According to test report No. 13/12-A422-B1 from January 09, 2014:



EN 1026	Air Permeability	EN 12207	Class 4
EN 1027	Water Tightness	EN 12208	Class E900
EN 12211	Resistance to Wind Load	EN 12210	Class C5/B5
EN 12046-1	Operating Forces	EN 13115	Class 1
EN 14351-1	Load bearing Capacity of Safety Devices	EN 14351-1	complied
EN 10077-1	Thermal Transmittance U_D	EN 10077-1	2,7 W/(m ² K)

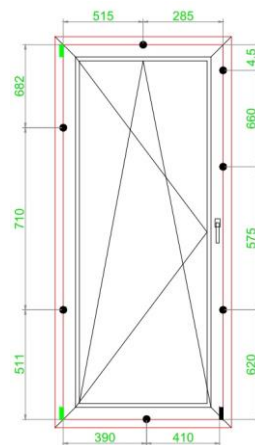

Validity Period of validity of EN 14351-1 : 2006 + A1 : 2010

Matthias Demmel
 Dipl. Ing. (FH) Matthias Demmel
 Head of Institute



Stephanskirchen
 April 14, 2014

Christoph Geiger
 M.Eng. Dipl.-Ing. (FH) Christoph Geiger
 Responsible Official